


COMP ACCESSORY MOUNT




WATERTIGHT FOR LIFE

Pegasus Solar's Comp Accessory Mount secures conduit, a junction box, or other accessories on composition shingle roofs. Designed to last decades, the one-piece flashing with elevated cone means there is simply nothing to fail.



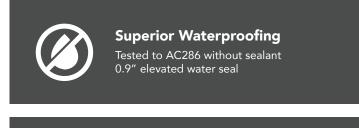





COMP ACCESSORY MOUNT

1. Drill pilot hole into roof decking.



2. Optional: Apply a "U-shape" of sealant to underside of flashing and position under 2nd shingle course, cone over pilot hole.





3. Place support block over cone and install lag through one-hole strap and EPDM washer.





4. Drive lag into roof decking until secure.











Specifications	Comp Accessory Mount Kits	
SKU	PSCA-0MB0	PSCA-0MM0
Finish	Black Flashing, Mill Support Block	Mill Flashing, Mill Support Block
Kit Contents	Flashing, Support Block, ¼" x 2.5" SS lag screw w/ EPDM washer	
Application	Conduit and Pegasus' J-box wing (P/N: PSUA-JM)	
Conduit Sizes	Up to 1 inch	
Roof Type	Composition Shingle	
Flashing Material	Painted Galvalume Plus	Galvalume Plus
Support Block Material	Aluminum	
Kit Quantity	12	
Boxes per Pallet	216	

Patents Pending. All rights reserved. $\ensuremath{\texttt{@}}$ 2019 Pegasus Solar Inc.