


# TILE ACCESSORY MOUNT



## Clean & Code Compliant Conduit Runs on Tile Roofs

Securely mount conduit or junction boxes in minutes. Pre-punched holes allow attachment of conduit strap or Pegasus J-box Wing. Run conduit at any angle across roof.

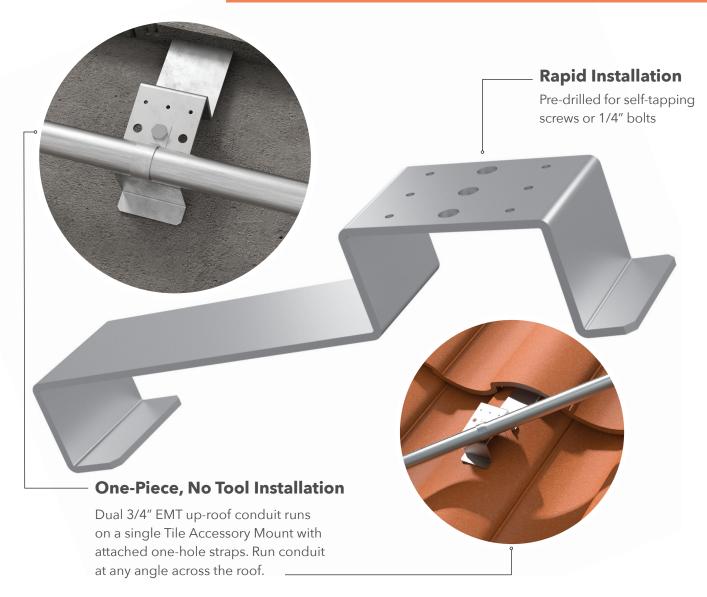

### 25-Year Warranty

Manufactured with advanced materials and coatings to outlast the roof itself



### **Code Compliant**

Securely holds conduit 1" above roof surface



#### **Mechanical Attachment**

Mechanically secures conduit to roof



#### **Universal Fit**

Install without tools on all Flat-, S- and W-shaped roof tiles



## TILE ACCESSORY MOUNT

Find location for mount and lift adjacent tiles to expose the top of the tile intended for the mount. Tile removal is not required



Insert mount between lifted tile and lower tile. Maneuver mount to ensure the "hooked" end of the mount is engaged with the top of the tile.




**3**Lower lifted tile and adjust adjacent tiles if any tile spacing has been disturbed by the installation.




Use self-tapper screws or included hardware to mount conduit straps or junction box bracket. Refer to the NEC for required conduit spacing.









SPECIFICATIONS	TILE ACCESSORY MOUNT
Compatible Tile	Flat, S, W
Install Application	Up to two 3/4" EMT or one 1" EMT
Tools Required for Install	None
Compatible Fasteners	Self-tapping screws or 1/4" bolts
Box Quantity	6
Master Pack Quantity	48
SKU	PSTA-AM

All rights reserved. ©2021 Pegasus Solar Inc.