



Never Deal With Caulking Again!

Install with InstaFlash. Factory-installed, non-hardening sealant. Works on wet or dry roofs, 0° to 170°F.

Save Money!

Use scrap rail. Eliminate waste. Reduce SKUs.

Speed Installation

Pre-assembled components. Level array without removing panels.





Save Money, No Waste

Use scrap Pegasus Rail or Pegasus Max Rail for Tilt Leg Reduce SKU's



Code Compliant

Fully IBC/CBC Code Compliant Exceeds ASCE 7-16 Standards UL2703 Certified



Adjustable and Flexible

Rated for installation angles of 0 to 35 degrees



25-Year Warranty


Manufactured with advanced materials and coatings to outlast the roof itself



INSTATILT"

US

С

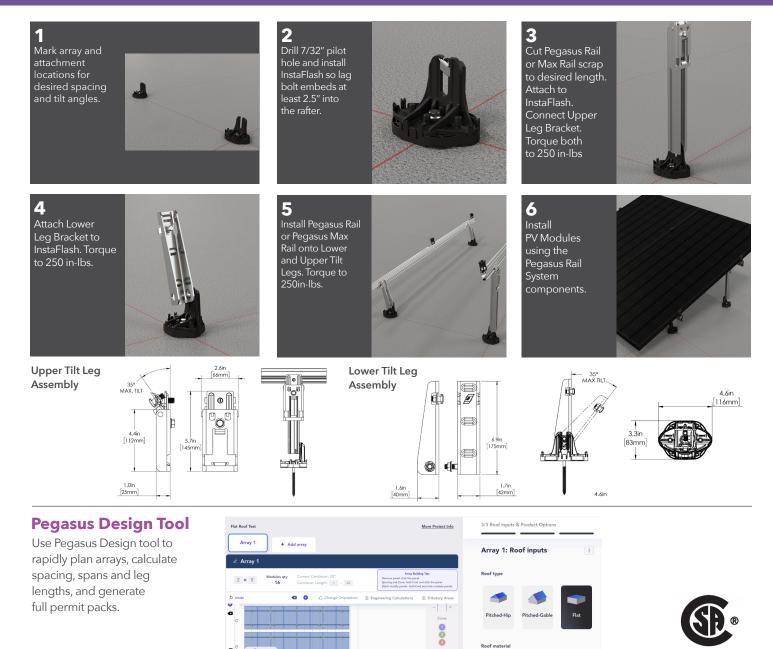

SPECIFICATIONS	INSTATILT	
SKU	PSR-ITLT	
Roof Type	Flat: 0 to 7 degrees, Compatible Roof Materials: Rolled Comp, BUR	
Tilt Angles	0-35 Degrees	SCAN FOR INFO
Compatible Scrap Rail	Pegasus Rail, Pegasus Max Rail	ENST
Flashing Type	Pegasus InstaFlash	
Certifications	IBC, ASCE/SEI 7-16, UL2703	
Kit Quantity	24	
Kit Contents	Upper and Lower Tilt Leg Brackets	SCAN FOR FREE SAMPLE

See www.PS-IP.com for intellectual property details. All rights reserved, ©2024 Pegasus Solar Inc.