

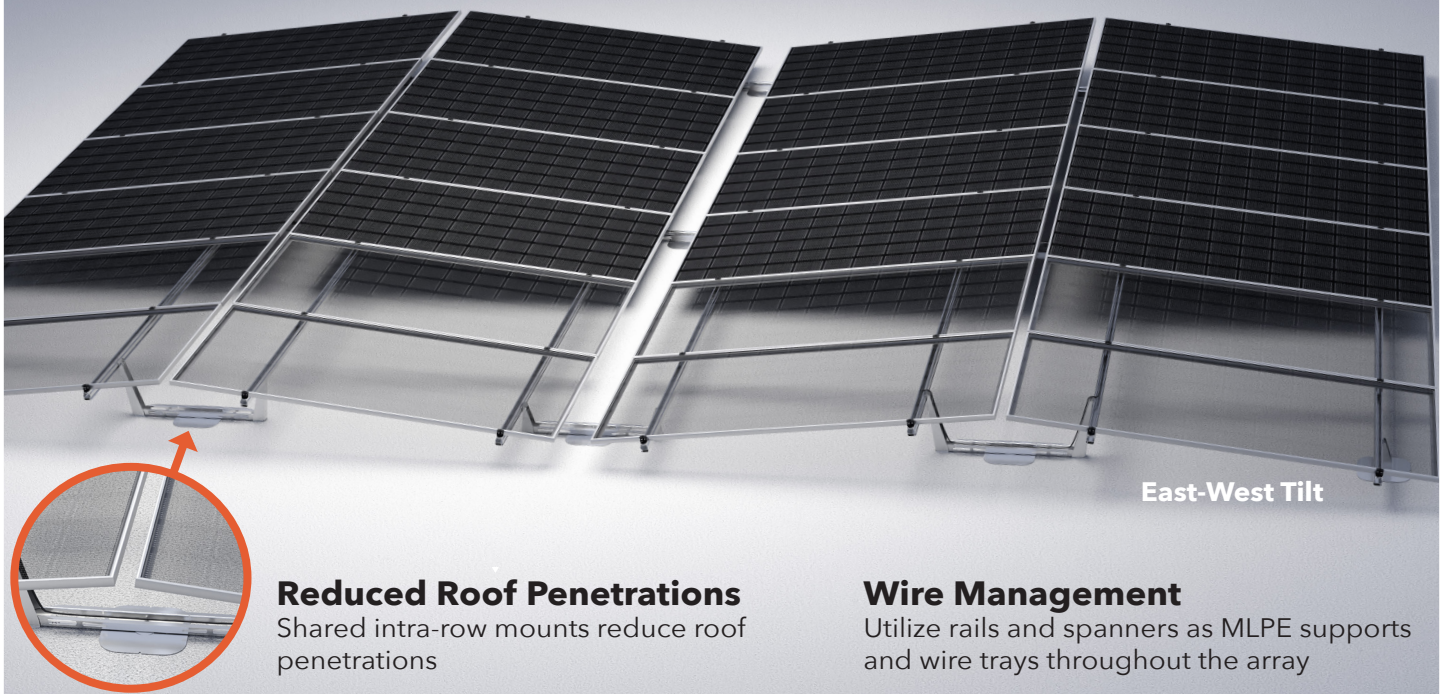


Lightweight

As low as **2.2PSF** including modules, microinverters, racking and roof attachments. Up to 180MPH winds.

Simple & Flexible

Install on TPO, PVC, concrete, and most other low-slope roofs. Configurable as East-West, South, or Flush.

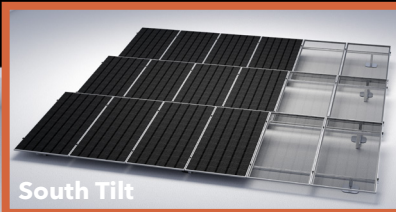

Reduced Roof Penetrations

Shared intra-row mounts reduce roof penetrations

Wire Management

Utilize rails and spanners as MLPE supports and wire trays throughout the array

A superior mounting system for ease and durability

The Pegasus FX fixed-tilt mounting system for flat roof commercial applications offers the perfect, trouble-free balance of simplicity, ease and durability. The light weight system is gentle on roofs yet provides the security of positive attachment.



Domestic Content

Domestic content rail & racking components can contribute to additional tax credits.



Lightweight

As low as 2.2 psf including modules & MLPE
Ideal for weight-sensitive roofs



Code Compliant


UL2703, UL3741
LTR-AE-001-2012 listed
ASCE 7-16 & 7-22




25-Year Warranty

Manufactured with advanced materials and coatings to outlast the roof itself


East-West

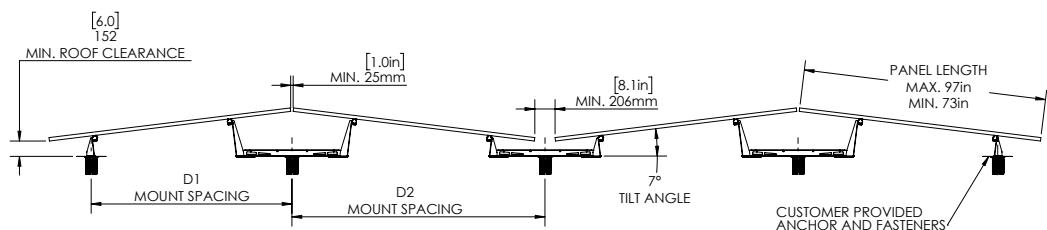



South

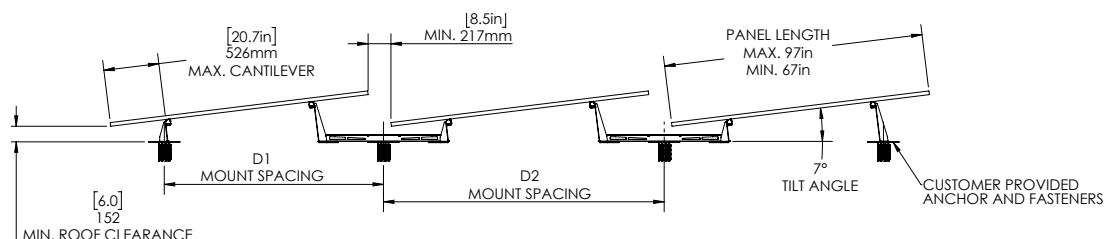

Flush

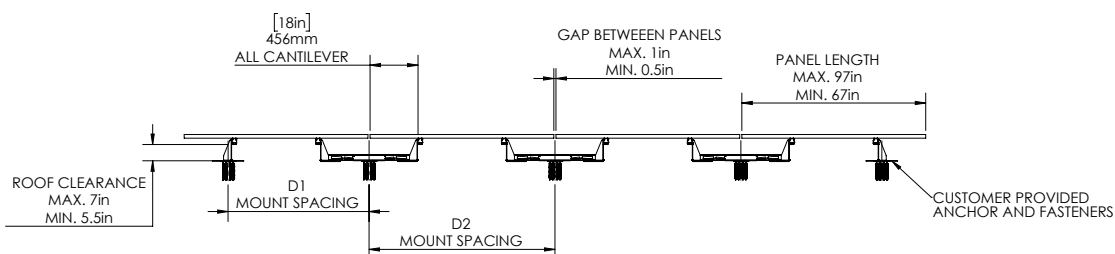

Your path through installation, from proposals and permits to BOM and PO submission. Integrated platform, effortless workflow.

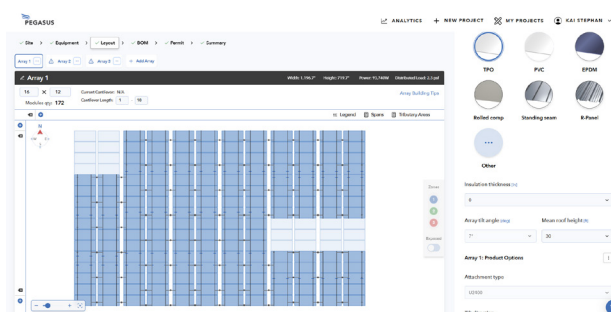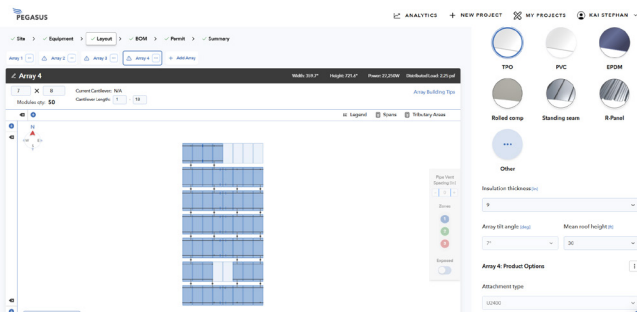

Specifications	FX South	FX E-W	FX Flush
Configurations	South Tilt	East-West Tilt	Flush
Module Tilt Angle	7°		0°
Roof Slope		0° to 7°	
Wind Speed		Up to 180 MPH	
Snow Load		Up to 50psf	
Module Orientation		Optimized for portrait	
PSF (Roof Load)		As low as 2.2 PSF	
Height Above Roof		Minimum 6"	
Roof Anchor		3rd Party	
Certifications	UL2703, UL3741, UL1741 & LTR-AE-001-2012; ASCE 7-16 & 7-22		
Compatible Rail	Pegasus Max Rail		